


ECOSTORM PLUS 1500

HIGH PERFORMANCE, COST EFFECTIVE
STORMWATER TREATMENT SYSTEM

PRODUCT OVERVIEW

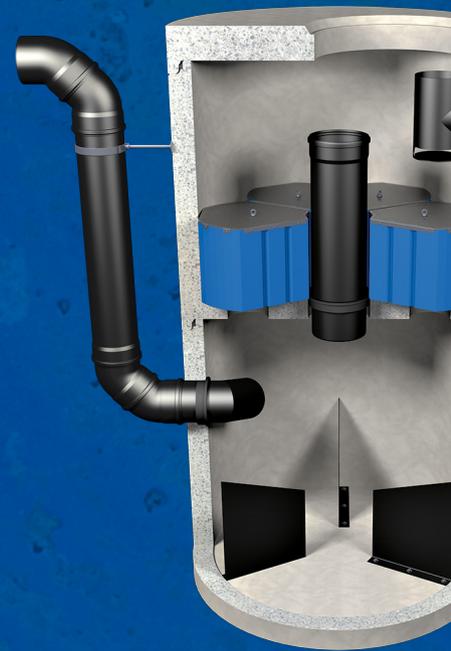

STORMWATER FILTRATION IS VITAL TO MAINTAINING THE QUALITY OF OUR FINITE WATER SUPPLY.

Ecostorm plus is an affordable stormwater filtration system designed to remove sediments, heavy metals and nutrients.

Surface water runoff contains significant concentrations of heavy metals and other soluble pollutants. Structural stormwater treatment systems are effective in removing sediments, but do not remove solubles such as heavy metals and nutrients (phosphates and nitrates).

By using various physical and chemical processes, the ecoStorm plus filtration system effectively and affordably removes both solids and dissolved substances, including:


- Heavy metals (zinc, copper, lead, cadmium, chromium, nickel)
- Hydrocarbons (mineral oils, polycyclic aromatic hydrocarbons)
- Nutrients such as phosphorous and nitrates

REMOVAL EFFICIENCY*

Removal efficiencies for all relevant pollutants far exceed both North American and European Standards for stormwater run-off.

- | | |
|--------------------------------|------|
| ▪ Total Suspended Solids (TSS) | >95% |
| ▪ Zinc (Zn) | >80% |
| ▪ Lead (Pb) | >95% |
| ▪ Copper (Cu) | >90% |
| ▪ Hydrocarbons | >98% |
| ▪ Phosphorous | >70% |
| ▪ Nitrates* | |


*detailed test reports are available upon request

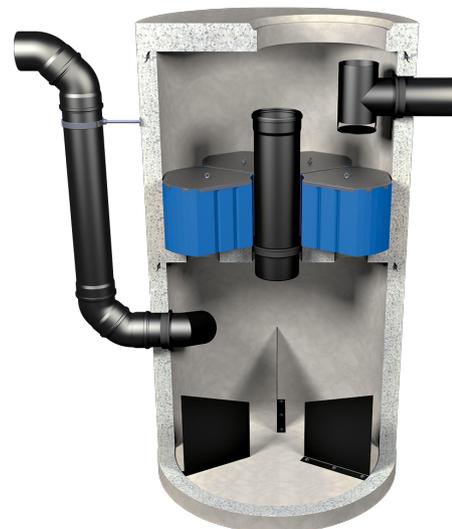

See why ecoStorm plus is the most cost effective stormwater filtration system on the market, setting new standards for stormwater regulatory requirements.

- In addition to filtration, the system utilizes chemical transformations, precipitation and sorption (ion exchange) to remove a variety of pollutants (heavy metals, hydrocarbons) from stormwater.
- More effective and affordable than conventional filters utilizing stainless steel, activated carbon or zeolites.
- Upstream sediment removal combined with self-cleaning filters reduces maintenance intervals and costs.
- Easy installation saves time and money - single-structure design comes pre-assembled to jobsite, reducing footprint and excavation costs.
- Has undergone extensive laboratory and field-testing with proven results.
- Patented filters can be modified to accommodate various applications and flowrates.


APPLICATIONS

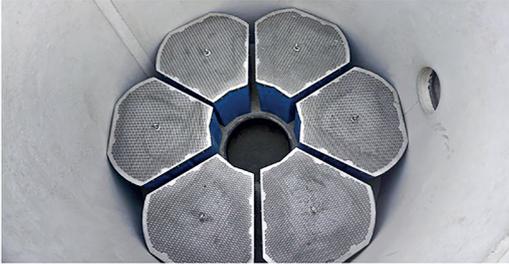

ecoStorm plus is ideal for new construction or retrofit of applications including:

- Surface water run-off from streets, highways and parking lots
- Treatment of run-off from mining operations
- Upstream to a rainwater harvesting tank
- Industrial manufacturing facilities
- Commercial/retail developments
- Municipal/residential drainage improvements
- Transportation/maintenance facilities
- Water quality improvement of ponds and lakes
- Stormwater run-off from surface areas generating less than 50gpm (3 l/s) treatment flow rate.


SPECIALLY DESIGNED FOR LOW-COST AND EASY MAINTENANCE

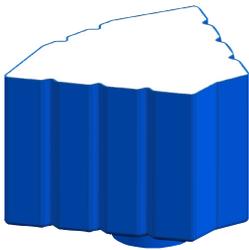


The frequency of sediment removal and filter replacement are dependent on site-conditions and pollutant loads. Sediment, which may contain heavy metals removed during the cleaning process, is disposed either manually or by mechanical suction.

Permeable substrate (PlusFilter) in the Pollution Control Pit is self-cleaning and is expected to remain effective for up to 5 years depending on pollutant loads. However, replacement filters should be considered at more frequent intervals where pollution loads are heavy. Replacing filters is simple and quick.


TREATMENT PROCESS




Sedimentation



Filtration



Adsorption



Precipitation

All ecoStorm plus units are equipped with a central overflow and maintenance pipe to handle peak flow rates and allow access to the sediment storage chamber. While ecoStorm plus is typically designed for gravity treatment of stormwater drainage, it has the flexibility to accommodate other methods of pollutant delivery. The patented substrate can be modified to accommodate various applications and flowrates.

Sedimentation

Sediments are removed from stormwater by gravitation and trapped in the base section of the ecoStorm plus unit. A small amount of sediment will accumulate temporarily on the lower surface of the filter (PlusFilter). The design of the ecoStorm plus system allows self cleaning.

Filtration

Vertical filtration in the pollution control pit and constant immersion in water of the filter prevents formation of a film on the lower side of the filter, which might otherwise lead to clogging.


Adsorption

Pollutants like hydrocarbons and dissolved heavy metals are adsorbed by the modified porous filter material.

Chemical precipitation

The filter buffers the pH of the stormwater, which is typically acidic, hence promoting precipitation and accumulation of dissolved substances. The fine pores of the filter allow water to seep slowly through the media providing greater opportunity for interaction between water and the alkaline composition of the filter.

WORKING PRINCIPLE

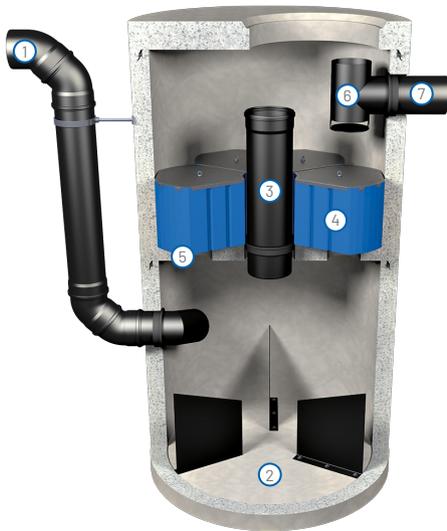

- ① Rainwater Inlet
- ② Sediment collection chamber
- ③ Cleaning port for sediments
- ④ Filter Element
- ⑤ Filter Support Plate
- ⑥ T-Outlet Pipe
- ⑦ Outlet to storm sewer or soakaway system


1. The rainwater from the connected area is fed into the base section of the filter housing. The tangential inlet generates a radial flow pattern.
2. The hydrodynamic separator converts turbulent waters into a radial laminar flow pattern, generating particle sedimentation, particularly of the sand fraction.
3. This takes place over an inlet to the lower section of the filter shaft. The sediment is retained in a sediment storage chamber below the separator. The sediment trap can be withdrawn for cleaning and has an integral cleaning port to the side to easy dirt removal.
4. In the central section of the filter housing is the actual filter. The filter element filters out the fine materials in an up-flow process and dissolved materials are precipitated and absorbed. The filter is backwashed from above. When exhausted the filter is easily exchanged.
5. The filter element is easily pulled up for replacement or maintenance.

TECHNICAL DATA

Rainwater filters complying with DIN 1989-2, Type B.

ecoStorm plus 1500 heavy traffic

Drainage Area: 1000 m²
Flow Rate: 22 l/s (348 gpm)

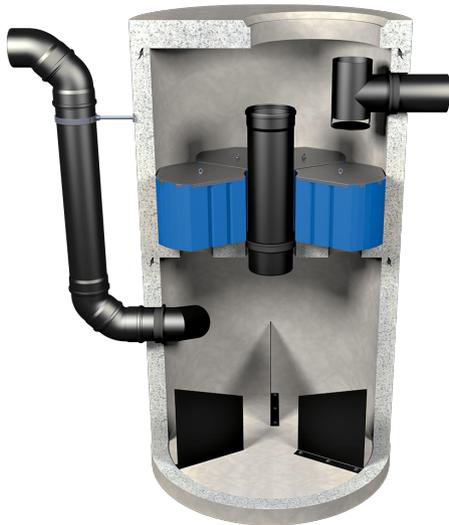

Pipe dimensions: DN 200 mm (8")
Number of Filter segments: 6
Housing material: Polyethylene, Stainless Steel
Weight: 420 kg/ unit

ecoStorm plus 1500 concrete tank (not supplied)

Pipe Dimensions: DN 200 mm (8")
Min. head pressure: 250 mm
Min. access opening: 625 mm
Internal diameter of concrete tank: 1500 mm

ecoStorm plus 1500 filter support plate (not supplied)

Height: 100 mm
6 circular openings (d=226 mm) for filter units
6 compression gaskets DN200
1 centric circular opening (d=341 mm) for maintenance pipe
1 compression gasket DN300



SCHLÜSSELBAUER 
ECOTECHNIC

Illustrations may differ from the original.
Version 07/2022: Subject to errors, technical changes and typographical errors.

SCHLÜSSELBAUER Ecotechnic GmbH & Co KG
A-4673 Gaspoltshofen, Hörbach 4
Tel. +43 7735 7320-0
support@ecotechnic.at | ecotechnic.at